


CASE HISTORY

THE MADRASA & KANQAH OF SULTAN AL GHURI, CAIRO, EGYPT

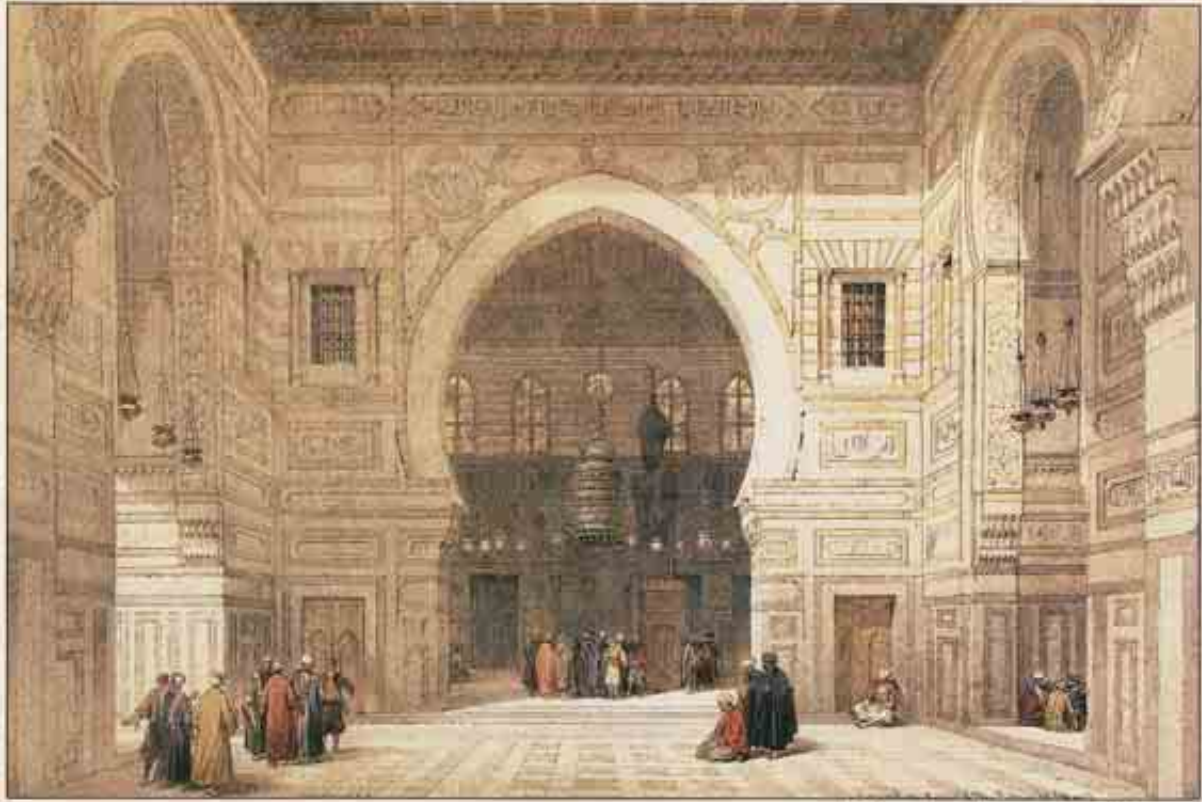

19th century illustration of Mosque

The Madrasa and Kanqah of Sultan al-Ghuri is monument number 189 of the Mohammedan monuments under the care of the Egyptian Antiquities Organisation. It is of the date 909-10 AH 1503-4 AD.

The Sultan Qansul al-Ghuri was the last but one of the Mameluk Sultans enjoying an unusually long reign for this period (1501-16). The Sultan died in the midst of battle against the Ottoman Turks, his body never discovered.

The funerary complex of Sultan al-Ghuri is situated in the Fahhamin quarter of Old Cairo in al-Muizz Street. On the west side there is a kanqah and mausoleum as well as a sabil kuttub. The minaret is a four storied rectangular structure approximately 50 metres high.

The Madrasa Mosque with its strong features, bold design, marble panels and intricate geometric design carved into the surface of the arches and ceiling represents the last great flowering of Mameluk art.



The al-Ghuri Mosque

CASE HISTORY

THE MADRASA & KANQAH OF SULTAN AL GHURI – THE DAMAGE

An inspection of the Madrasa revealed some very severe long-standing problems. The floor of the mosque undulated dramatically, providing evidence of very significant foundation problems of the masonry vaults supporting the floor. Attempts had been made in the past to underpin the sleeper walls supporting the vaults, these had failed. All of the walls of the mosque exhibited very severe fractures. The problems were brought about by earthquake damage in October 1992 and by the rising contaminated ground water. Further problems in the external walls had been caused by the activities of the shopkeepers trying to enlarge the space available for selling their wares. As a consequence, sections of masonry have been demolished at ground floor level to create this additional space.

The net result of the above was that the mosque of al-Ghouri was in a very delicate state of equilibrium. Despite having survived for nearly 500 years, the toll of a rising water table, earthquakes and neglect had brought this structure to the point of collapse. Urgent measures were required to reintroduce some structural strength and stiffness into the building.

It was understood that the Madrasa was underpinned by using a system of micropiling. The requirement therefore remained to tie the elements of the superstructure together. The very high walls were laterally unrestrained and very vulnerable to lateral forces such as may be produced by the next earthquake.



Seismic damage to decorative arches



Temporary support of the Dikka arches



Lintel stones




Vertical shear crack

CASE HISTORY

THE MADRASA & KANQAH OF SULTAN AL GHURI, CAIRO, EGYPT – THE REPAIR




Dikka arch in the main courtyard

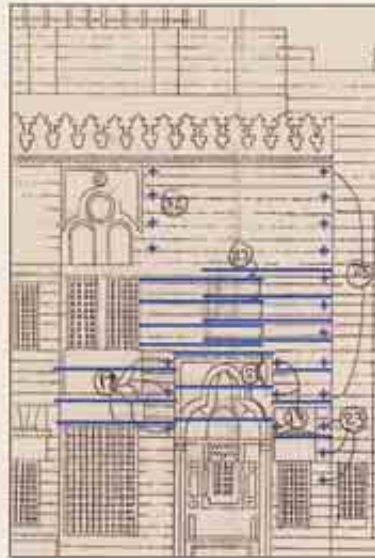

The Cintec stitching system was extensively used at al-Ghuri. These reinforcement anchors, up to 12 metres long, serve to stiffen each individual wall immensely. The walls of al-Ghuri are generally of two facing skins in-filled with a core of rubble. The large arched openings in the mosque are particular points of weakness in the structure. Longitudinal ties in each of the stone facings of the wall above the arch would serve to resist the thrusts naturally produced by the arch as well as serving to assist the walls to resist the next earthquake. In addition to longitudinal ties, transverse ties of length equal to the thickness of the wall were introduced to increase the strength of the wall.



Drilling the vaults

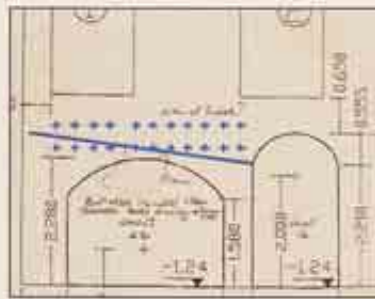

Typical repair detail for the arched vaults at ground level



Front core replaced, after anchor installation and made good



Drilling the stonework after removal of front core



Decorative panels being drilled ready for installation of consolidation anchors




Anchor installed & inflated ready for front core to be replaced



The diamond drilling rig



Diamond drilling the arch stones



Typical anchor placement details for the arches and side walls



One of the four arches of the court being scaffolded prior to drilling and anchoring

CASE HISTORY

THE MADRASA & KANQAH OF SULTAN AL GHURI, CAIRO, EGYPT

The Cintec stitches would also be used to tie the roof structure to the perimeter walls and create a diaphragm action. Again this is an internationally recognised system of introducing greater stiffness and earthquake resistance into a structure. The beauty of the Cintec anchor is that it contains the grout to be used within a sleeve and control of grout flow and its impact upon the existing structure is therefore very good.

The anchors to be used would be invisible in the repaired structure, eventually over 1200 metres of anchors were installed at al-Ghuri. The installation team needed to keep a fine balance between the archeological project and Egyptian Authority whilst encountering natural hazards like dust, confined working spaces, insects and high temperatures.

The success in refurbishing this ancient mosque, was as a result of the combined association of Cintec, Arab Contractors, Intro Trading and the advice and co-operation of the Egyptian Antiquities Organisations thus ensuring the stability of this 500 year old important heritage building.



typical consolidation anchor prior to grout injection




5 metre long vertical anchors at roof level



Roof section above central courtyard



*Market place outside Mosque
19th century illustration*

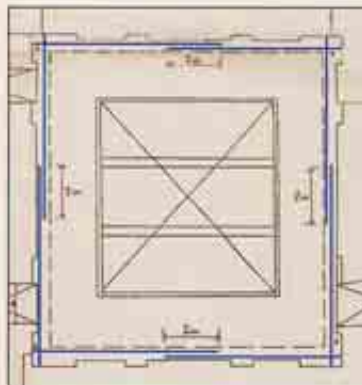

Roof consolidation anchors



installed roof anchor